



**2. TOPFAR THERMOSTATIC VALVES**

Also available with iron pipe connection



**Art. 0108**  
Thermostatic angled valve  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0109**  
Thermostatic angled valve  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"




**Art. 0128**  
Angled lockshield valve  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0129**  
Angled lockshield valve  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"




**Art. 0101**  
Thermostatic valve, angled-left version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"

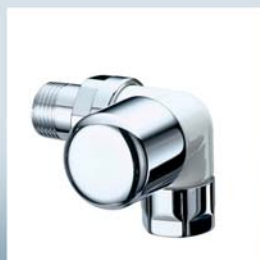

**Art. 0111**  
Thermostatic valve, angled-left version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0122**  
Lockshield valve, angled-right version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"

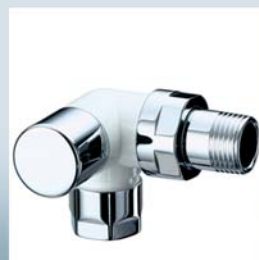

**Art. 0132**  
Lockshield valve, angled-right version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0102**  
Thermostatic valve, angled-right version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0112**  
Thermostatic valve, angled-right version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0121**  
Lockshield valve, angled-left version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"



**Art. 0131**  
Lockshield valve, angled-left version  
- Interchangeable sizes for copper,  
plastic and multilayer pipe  
- Size: 3/8" -1/2"

**Installation overview of Art.0108 and Arts.0102-0121 on radiator.**

In addition to thermostatic valves suitable for normal positioning of thermostatic or thermo-electric heads (Fig.1) FAR offers space-saving valves which permit a choice of flow direction dependant on system constraints and available space (Fig.2).



Fig.1

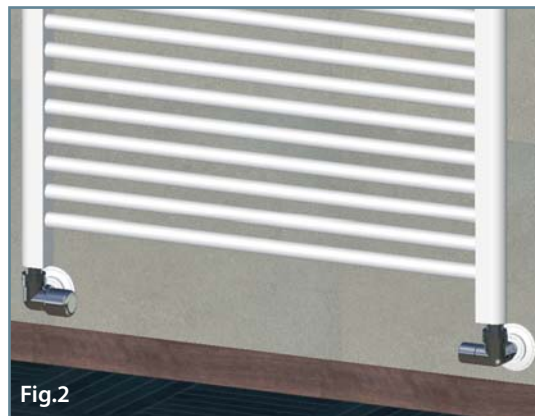
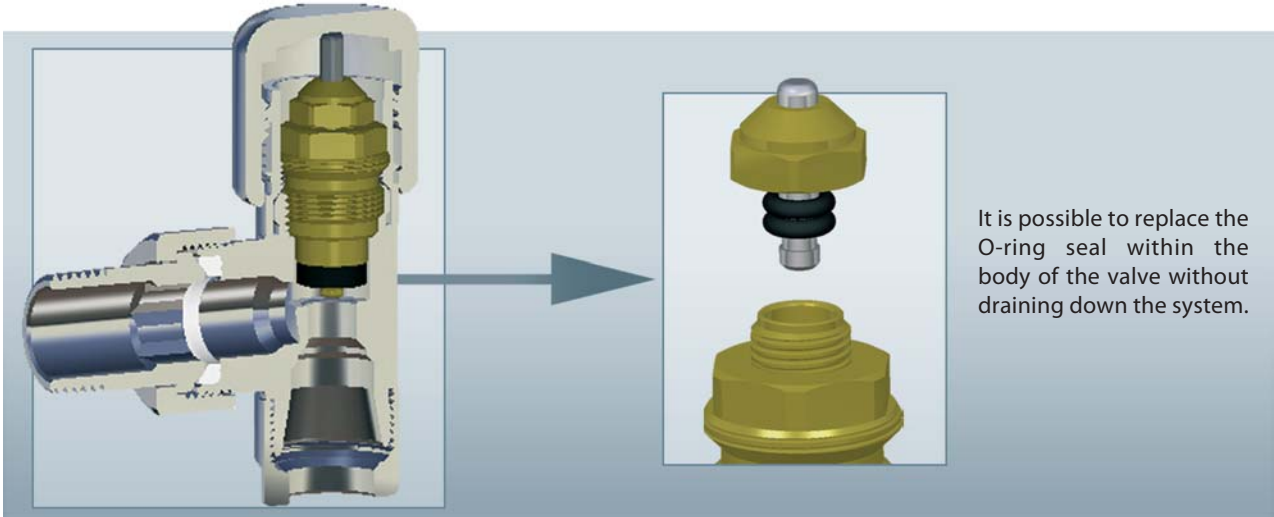
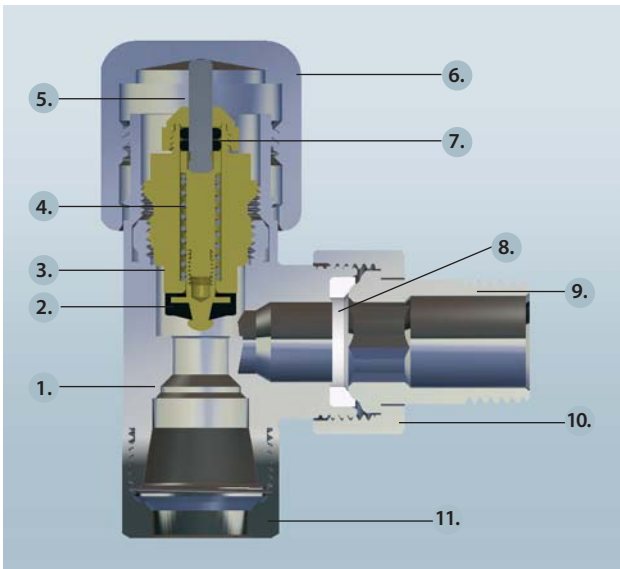


Fig.2

**3. CONSTRUCTION FEATURES**


It is possible to replace the O-ring seal within the body of the valve without draining down the system.

**4. CONSTRUCTION MATERIALS AND TECHNICAL FEATURES**

**Construction Materials**


1. Valve body	CW617N brass
2. Shutter	EPDM
3. Body	CW614N brass
4. Spring	AISI 302 steel
5. Pin	AISI 303 steel
6. Handle	CW614N brass
7. Sealing O-rings	EPDM
8. Sealing seat	HPF
9. Terminal body	CW617N brass
10. Tightening terminal nut	CW617N brass
11. Nut	CW617N brass

**Technical features**

Nominal pressure:	16 bar
Max. temperature:	95° C
Compatible fluids:	water, water with glycol

**5. INSTALLATION COMPONENTS**


TOPFAR valves and lockshield valves are available with iron and interchangeable connections for copper, plastic and multilayer pipe.

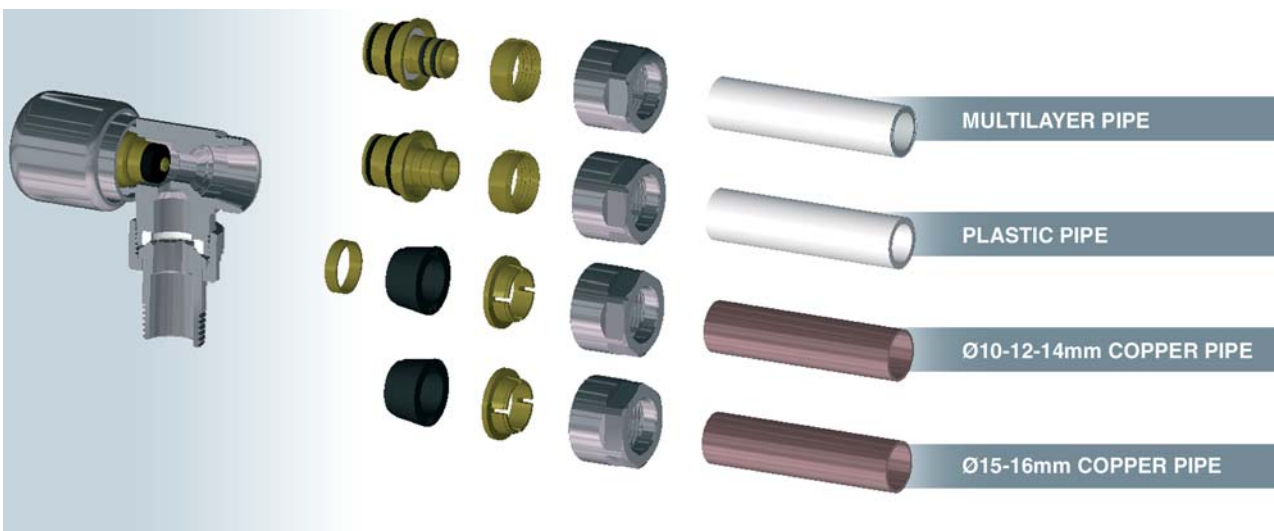

**6. INSTALLATION OF THERMOSTATIC HEAD**

The thermostatic head of TOPFAR models is provided with a liquid sensor, which detects temperature variations and opens or closes the valve accordingly. It has a regulating scale numbered from 1 to 5 to permit selection of the desired temperature.

1. Unscrew the handle and the brass support, extracting them from the valve body
2. Set the selector to position 5
3. Pull the ring towards the selector and the locking key towards the lower part
4. Position the head, as indicated below, in the appropriate grooves
5. Move the locking ring towards the valve, up to the FAR logo and push the locking key.

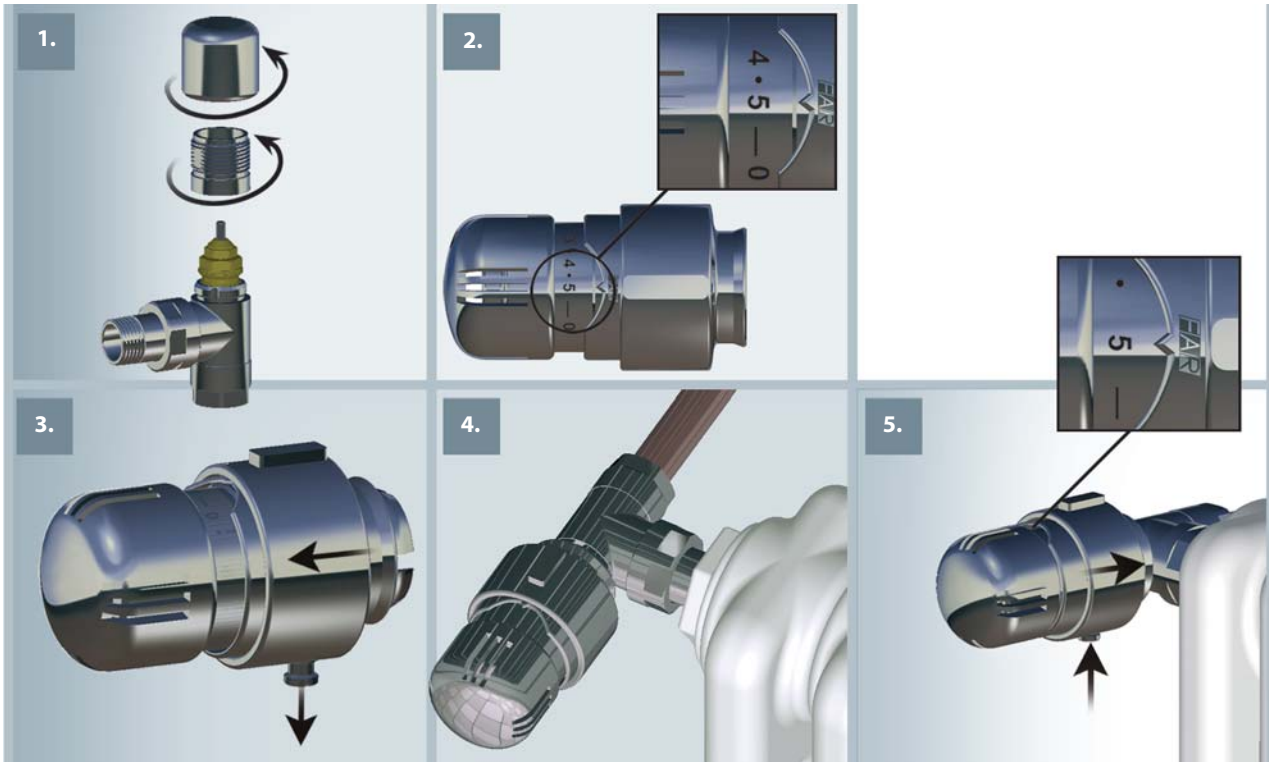**Installation procedure**


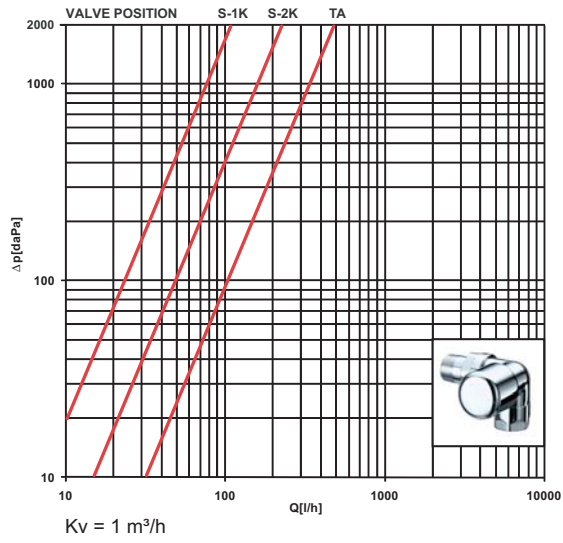
POSITION	CORRESPONDING TEMPERATURE (°C)
0	NO RADIATOR
☼	7
1	12
2	16
3	20
4	24
5	28

**7. THERMOSTATIC HEAD TECHNICAL FEATURES**


Max. differential pressure:	1 bar
Reference point:	3 = 20° C
Max. room temperature:	50°C
Temperature range:	7-28°C
Antifreeze operation:	7°C
Hysteresis:	0,35K
Proportional band:	2°C
Response time- 6.4.1.13 EN215 point:	23 min

8. FLUID DYNAMIC FEATURES


Art. 0101-0102-0103-0104-0111-0112-0113-0114 38




Art. 0101-0102-0103-0104-0111-0112-0113-0114 12

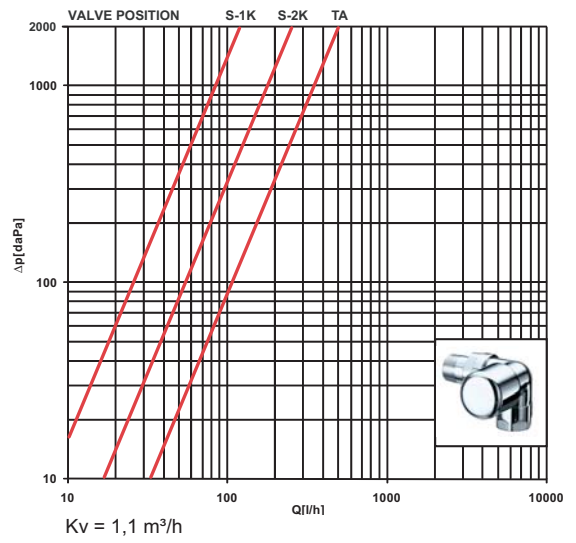


Art. 0108-0109-0148-0149 38

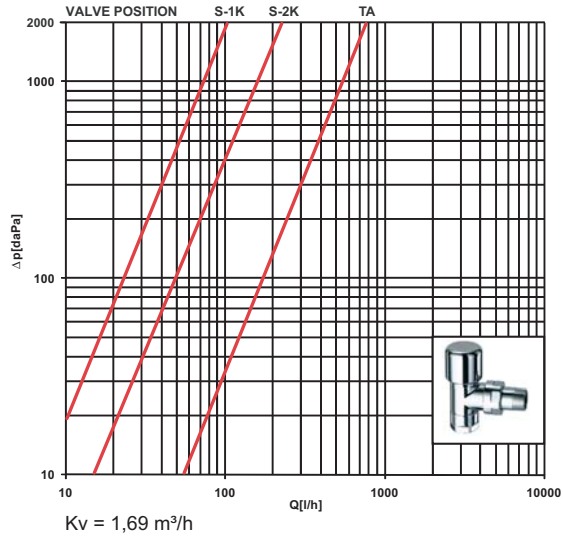

Art. 0108-0109-0148-0149 12

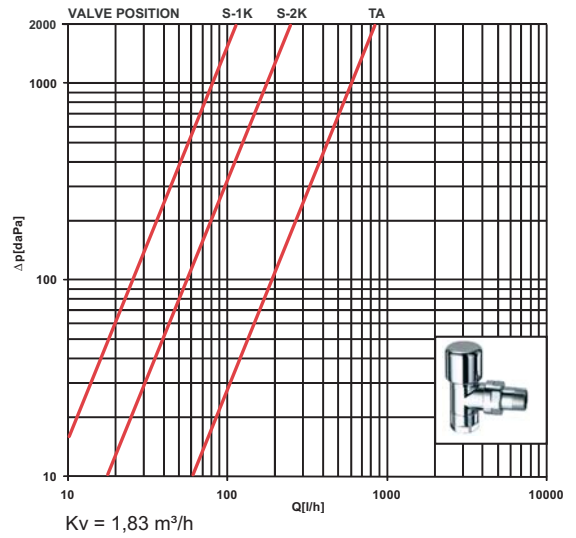


Art. 0121-0122-0123-0124-0131-0132-0133-0134 38

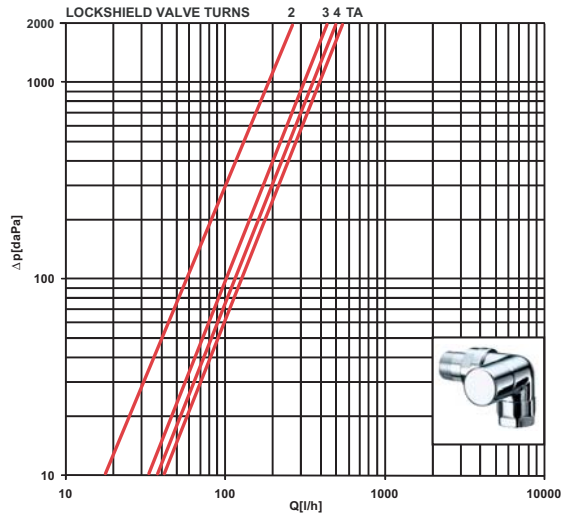


TURNS	2	3	4	TA
Kv [m <sup>3</sup> /h]	0,62	0,99	1,08	1,19


Art. 0121-0122-0123-0124-0131-0132-0133-0134 12

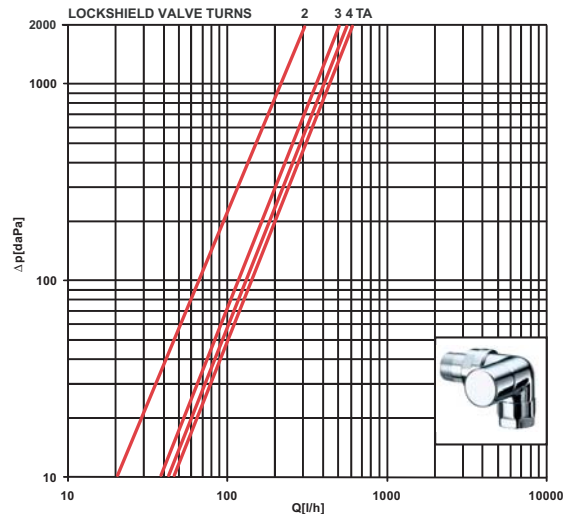


TURNS	2	3	4	TA
Kv [m <sup>3</sup> /h]	0,67	1,13	1,23	1,3

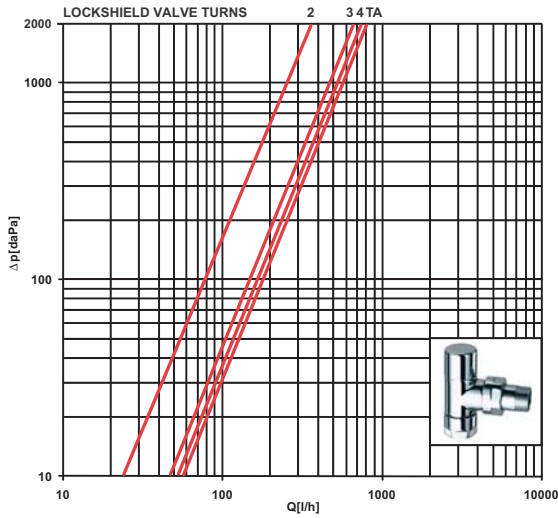**Art. 0128-0129-0168-0169 38**


URNS	2	3	4	TA
Kv [m³/h]	0,62	0,99	1,08	1,19

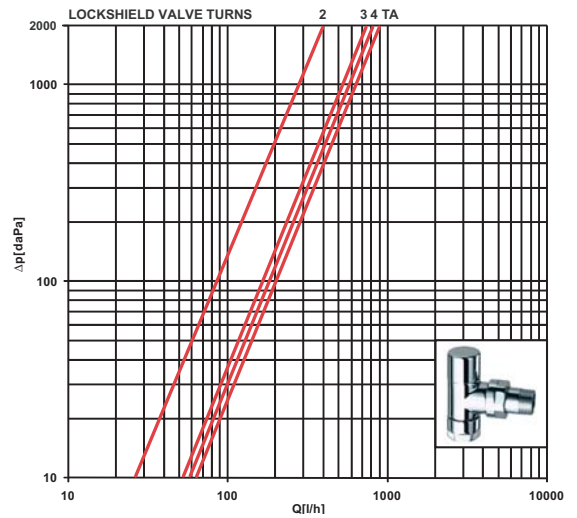
**Art. 0128-0129-0168-0169 12**


URNS	2	3	4	TA
Kv [m³/h]	0,89	1,62	1,82	1,99

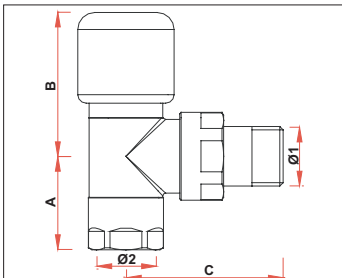**9. DIMENSIONAL FEATURES**


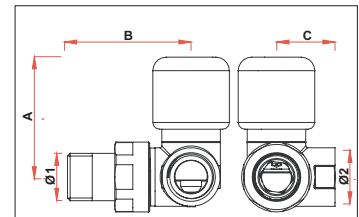
\*= with and without thermostatic head

CODE	Ø1	Ø2	A	B*	C
0108-0109 38	G3/8	24x19	33	51-100	53
0108-0109 12	G1/2	24x19	33	51-100	56

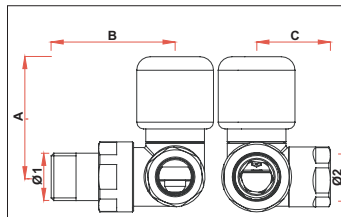


\*= with and without thermostatic head

CODE	Ø1	Ø2	A*	B	C
0101-0111 38	G3/8	24x19	53-102	52	33
0101-0111 12	G1/2	24x19	53-102	55	33
0102-0112 38	G3/8	24x19	53-102	52	33
0102-0112 12	G1/2	24x19	53-102	55	33




\*= with and without thermostatic head


CODE	Ø1	Ø2	A*	B	C
0103-0113 38	G3/8	G3/8	53-102	52	26
0103-0113 12	G1/2	G1/2	53-102	55	26
0104-0114 38	G3/8	G3/8	53-102	52	26
0104-0114 12	G1/2	G1/2	53-102	55	26

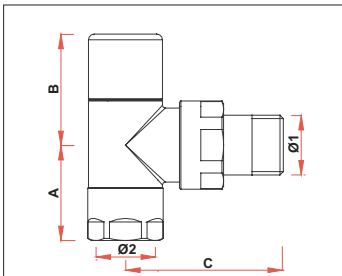


CODE	Ø1	Ø2	A	B	C
0128-0129 38	G3/8	24x19	33	39	53
0128-0129 12	G1/2	24x19	33	39	56

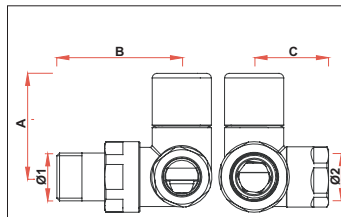

CODE	Ø1	Ø2	A	B	C
0121-0131 38	G3/8	24x19	46	52	33
0121-0131 12	G1/2	24x19	46	55	33
0122-0132 38	G3/8	24x19	46	52	33
0122-0132 12	G1/2	24x19	46	55	33

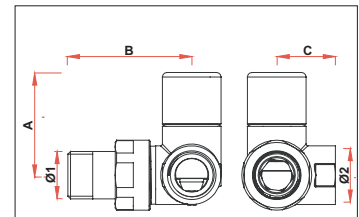


CODE	Ø1	Ø2	A	B	C
0123-0133 38	G3/8	G3/8	46	52	26
0123-0133 12	G1/2	G1/2	46	55	26
0124-0134 38	G3/8	G3/8	46	52	26
0124-0134 12	G1/2	G1/2	46	55	26

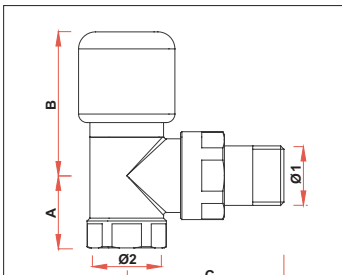


\*= with and without thermostatic head

CODE	Ø1	Ø2	A	B*	C
0148-0149 38	G3/8	G3/8	26	51-100	53
0148-0149 12	G1/2	G1/2	26	51-100	56

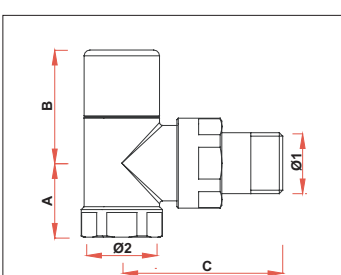

CODE	Ø1	Ø2	A	B	C
0168-0169 38	G3/8	G3/8	26	39	53
0168-0169 12	G1/2	G1/2	26	39	56



CODE	A	B
1824	86	48
1827	86	48